


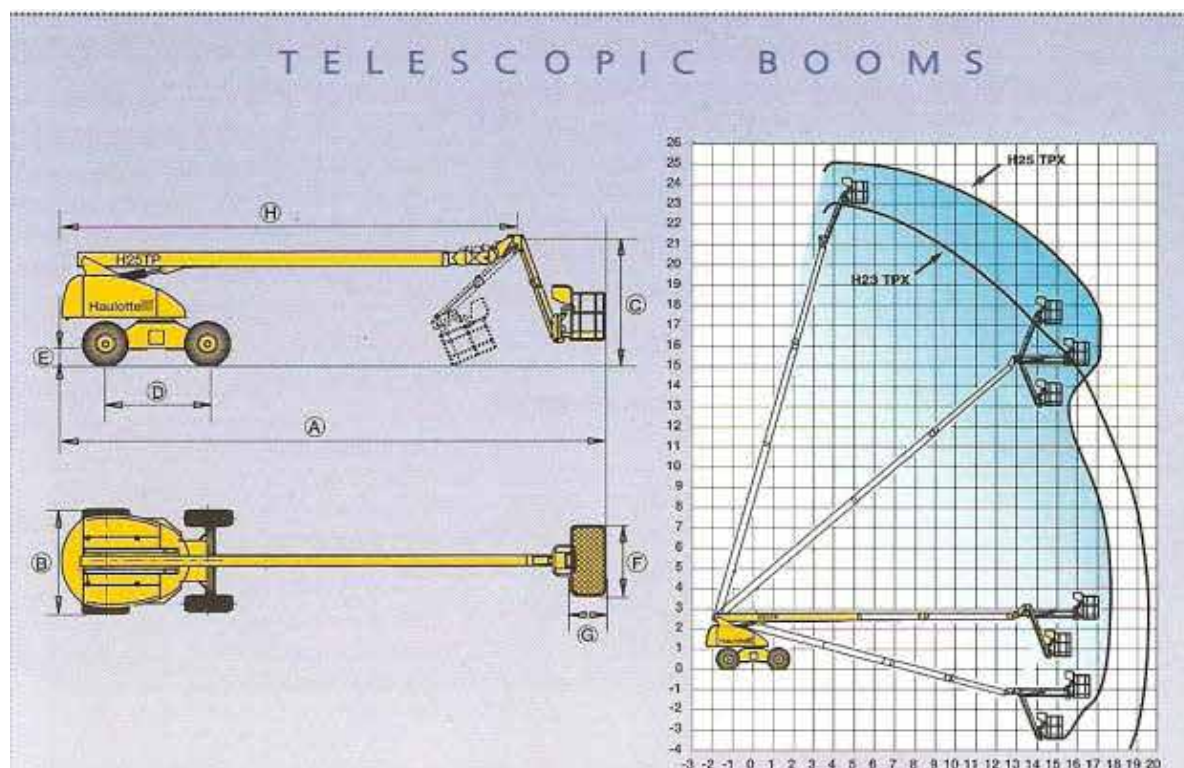

SPECIFICATIONS

	H23TPX		H25TPX	
Working height	74 ft	22.6 m	82 ft	25.05 m
Platform height	68 ft	20.6 m	76 ft	23.05 m
Horizontal outreach	64 ft	19.5 m	58 ft	17.6 m
Platform capacity	550 lb	250 kg	550 lb	250 kg
Fly jib range of motion	140° (+70°/-70°)		140° (+70°/-70°)	
Jib length	7 ft 2 in	2.2 m	7 ft 2 in	2.2 m
A Length	33 ft 7 in	10.24 m	43 ft	13.07 m
B Width	8 ft 2 in	2.48 m	8 ft 2 in	2.48 m
C Stowed height	9 ft 3 in	2.82 m	9 ft 3 in	2.82 m
D Wheelbase	8 ft 2 in	2.48 m	8 ft 2 in	2.48 m
E Ground clearance	14 in	34 cm	14 in	34 cm
F G Platform size	71 in x 32 in	1.8 m x 0.8 m	71 in x 32 in	1.8 m x 0.8 m
H Travel/transport length	26 ft 8 in	8.15 m	35 ft 4 in	10.78 m
Tailswing	3 ft 5 in	1.06 m	3 ft 5 in	1.06 m
Drive speed	3.1 mph	5 km/h	3.1 mph	5 km/h
Outside turning radius	20 ft 2 in	6.15 m	20 ft 2 in	6.15 m
Turntable rotation (continuous)	360°	360°	360°	360°
Hydraulic platform rotation	180°	180°	180°	180°
Gradeability	40%	40%	40%	40%
Engine	Diesel Hatz 3 L 41C - 32.1 kw		Diesel Hatz 3 L 41C - 32.1 kw	
Controls	proportional	proportional	proportional	proportional
Tyres (foam filled)	15 R 22.5 XF	15 R 22.5 XF	15 R 22.5 XF	15 R 22.5 XF
Hydraulic tank	40 gallons	150 l	40 gallons	150 l
Fuel tank	37 gallons	140 l	37 gallons	140 l
Weight	30,312 lb	13,750 kg	30,532 lb	13,850 kg